

Product Sales Sheet

Everlast SmashTile

This 2-foot by 2-foot by 2.5-inch molded tile is designed for areas where extreme durability and ultimate impact absorption are required. SmashTile mitigates the shock and sound resulting from weights being released onto its surface by absorbing impact. SmashTile is the perfect compliment to platform style weight lifting.



Markets

- Fitness
- Sports
- Student Rec

Applications

- Light Weights
- Moderate Weights
- Heavy Weights
- Strength Equipment

Benefits

- Superior impact absorption
- Patented "Ultra" high-density wear layer
- Slip resistant
- Easy Quad Blok installation system



Product Options

Size:

Available as a standard in tiles. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.




2.5" (6.4 cm) x 24" (61cm) x 24" (61cm)

Color Options:

• Available in 17 color options.

Quad Blok:

• SmashTile uses Ecore's Quad Blok interlocking system

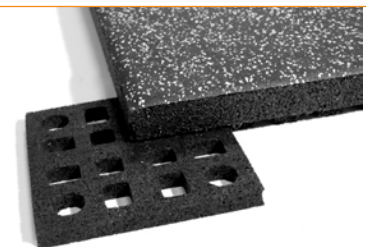



Technical Details

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	
Coefficient of Friction	ASTM D2047	> 0.9
VOC Compliant	ASTM D5116	
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	
Pill Test	ASTM D2859	Pass
Standard Vertical Deformation	ASTM F2772	
Surface Effect Slip Resistance	ASTM F2772	
Ball Rebound	ASTM F2772	
Force Reduction	ASTM F2772	
Impact Insulation Class*	ASM E492	59
Delta IIC*	ASTM E2179	29

*Tested on a 6" concrete slab with no ceiling.



67.7%


Force Reduction
Absorption of impact energy



46.1%

Energy Restitution
Useful return of impact energy

Values based on Delttec Test

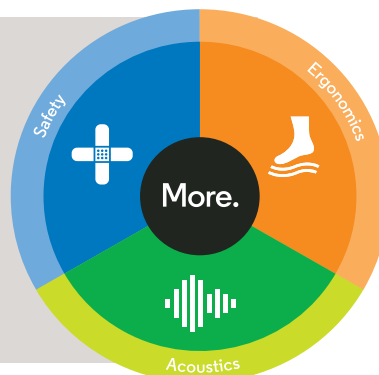

Can a floor
do more?
Yes.